G.R.S. IX—5]

Previous references. 1923. File No. 16-23

Pris) Revenue Serial Nos. 1-3.

Later references.

Pris 16-23 (4-5)

" 29-24 (1-2).

pwrs 64-36/1922

Preserved

GENERAL AND REVENUE SECRETARIAT.

Serial Nos. 3

Part B for December 1923.

SUBJECT

Estimates for electric installations in the Mysore gaol.

Ordered to be laid over till next budget time.

Manavasamy Iyengar
4/1/24

GENERAL AND REVENUE SECRETARIAT.

(Pus

NOTES.

File No. 16-23

FILE HEADING.

Estimate for electric installation in the Nyaungdon Jail

From The Dy Comrs

No. 1409/32-22 Dated 6.8.23 Received 9.8.23

Diary No. 85-3	Enclos. 1 file	Spare Copies.	Serial No. 1

BRIEF ABSTRACT OF LETTER.

Forwarding an estimate for the electric installation in the Nyaungdon Jail and stating that as there is no provision in the current year's budget, the work may be ordered to be taken up on hand immediately pending adjustment ~~to be~~ on.

NOTES AND ORDERS.

Pus not copies to be sent Please give details - Ke

Lad? The total cost for the electric & telephone installation comes to Rs 3651/- The Dy. Com has stated that there is no provision for this in the current year's Budget. It is perhaps too early to say more whether any savings

Serial No.

can be expected. The estimate may now be sanctioned, but the work can only be commenced after budget provision is shown for incurring the expenditure. Orders

Secy to Govt 11/8/23

The amount is rather large & it is not likely that savings to that extent may be expected in the prisons budget. If the estimates & the proposal are sanctioned, the Fin Secy will not object to the inclusion of the amount in next year's budget as a sanctioned item. Work can commence next year. The estimates contemplate Electric lighting only and not Telephone. Communication. So far as the Jail proper is concerned, the matter may be urgent, but regarding the quarters of the different officers, the urgency is not clear. Submit for orders

not Covered

Govt Secy

cag 13/8

The estimates are for lighting & telephone. Details are as follows:

1	lighting for Jailors Qrs		465 Rs
2	——— By Jailors Qrs		330 Rs
3	——— Sub Asst Surg Qrs		565
		Total	1360
4	Offices, Dispensary etc		1234
		Total	2594
5	Telephone Connection		440
			Rs 3034

NOTE—Contn. sheet.

G. R. S. III-2]

General and Revenue Secretariat.

File No. 16 of 1927

Serial No.

The Question of providing electric light for the several Quarters may well lie over. The other two estimates one for lighting the Mint, fall one for Rs 1234 & the other for telephone Communication for Rs 448/- may be sanctioned & the 16 of Pri will indicate the source for which the Expenditure may be met.

To sanction the estimates against likely savings does not appear to be a sound Commercial practice.

1st November

1222
15-8-27

16/4/8

Mint Engineer - Please note this. Municipal Secretary - Please note this. Registering Corporation Accounts has for an estimate sanctioned for lighting this year this Local Government and 2 this Conveyances.

Mint. Please take action accordingly 16/4/8

put Draft Letter

16/8/27

OTE—Contn. sheet.

G. R. S. III-2,

General and Revenue Secretariat

File No. 16 of 1923

Serial No.	
2	The Dy Inspr of Prisons Ho. P. 1802/308.23 states that Govt will be pleased to accord sanction to the estimate of Rs 1234/- incy to provide lights for the Offices Hr Quarters & to the estimate of Rs 448/- for telephone connection
3	letter No. 1789/32-22 dy 3-11-23 from the Dy. Warden, stating in reply to G.O. 2 that it is not possible to draw funds from the Prison Vote for the purpose, and requesting that the cost may be met from the General Savings of the State Budget for 1923. Perhaps electric lights may be deferred, till funds are secured. Still in consideration that the work is of an emergent nature, the Govt feels has to be constructed to provide funds for the purpose.
Recd 16/11/23 No 8/4	The Dy Supdt of Prisons is not Sanctioning meeting the cost from his budget, but would request the cost to be met from the general savings from the State Budget as above.

NOTE—Contn. sheet.

G. R. S. III-2,

General and Revenue Secretariat. | File No. 16 of 1923

Serial No.

The Financial Deptt will not accept this. The work, though urgent may perhaps lie over till provision is made in next year's budget, or the Fin Secrt may be consulted as to the Dy's proposal of fin some money to meet the cost.

Leg Secy

cag 15/11

Financial Secretary may be consulted.

4602 16/11

First Member

15/11

cag 16/11

Provision for this may be made in the next year's budget. Thus submit to the Financial Secretary

Chief 22/12

Financial Sec'y with compts

This can only be considered for consideration at Budget time. Whether this can or can not be included in Budget can not be decided now

5/12

cag 5/12

Mehta 6/12

Mehta

FINANCIAL SECRETARIAT. R 1007/23 - 5 DEC. 1923

NOTE—Contn. sheet.

4564 13-12-23

d to Secy First Member.

Mehta 12/12/23

cag 13/12

Mehta 13/12

1922 6

G. R. S. III-2]

General and Revenue Secretariat. | Pais File No. 16 of 1922-23

Serial No.

If the Financial Secretary bears this in mind at the time of budget it is quite sufficient.

Rh
16/12

17/12

H 1007/23

May be sent to him for personal.

Ltr sent

Cag 17.12

Tel Ltr
Wk Comptr

18/1

Cag 18/12

Seen and returned
18/1

The item has been noted in the list to be considered at budget time.

20/12/23

Cag 21/12

Mr Rangachari
Please have a list prepared carefully
Cag

noted
Cag
21/12/23

Ltr 24 March

NOTE—Contn. sheet.

5533

653
P. 7

No. 1409 Encl one file (20)
32-22.

Office of the Inspector-General of Prisons
in Mysore, Bangalore,
Dated, . 6th August 1923.

JUDICIAL AND REVENUE SECRETARIAT
9 AUG 1923
JUDICIAL BRANCH
7 AUG 1923

From

Dr. B. Mahomed Usmon, L.M. & S., Pris 16-23 —1
Ag. Inspector-General of Prisons
in Mysore, Bangalore.

To

The Secretary to the Government of His Highness
the Maharaja of Mysore, General Department,
Bangalore.

Sir,

As desired in your Memo No.P.9508 dated the 8th March 1923 forwarding copy of your communication to the Chief Engineer for Roads and Buildings in Mysore anent the arrangement for - necessary repairs to the Mysore Jail referred to in the report of my inspection of that Jail in October 1922 and requesting to have estimates prepared for electric lights and telephone connections to the Jail in consultation with the Electrical Department, I have the honour to forward herein enclosed the estimate received in this connection from the Superintendent of the Mysore Jail.

I beg to state that no provision has been made in the current year's Budget of the Prisons Department for this purpose. It is also very early to anticipate savings from any of the sanctioned heads, but the work being very important and of an urgent nature, I request that the same may kindly be ordered to be taken in hand, pending the adjustment of the amount from the savings likely to be effected in the Budget provision of this Department.

I have the honour to be,
Sir,
Your most obedient servant,

Usmon

Ag. Inspector-General of Prisons.

Report to accompany the estimate for installing Electric Lights to the Mysore District Jail and Quarters connected therewith.

****

These estimates are prepared as per letter No.814/724 dated the 13th March 1923 from the Superintendent, Mysore Jail.

****

The following estimates are for installing electric lights to the Mysore Jails and the quarters connected therewith. The estimates are distinct and separate and are for the following buildings.

1. Jailor's quarters. 2. Deputy Jailor's Quarters. 3. Sub-Asst: Surgeon's qrs: 4. Buildings within the Jail compound and they include offices, kitchen block, hospital, dispensary, sentry's room.

Each estimate is further sub-devided as:-

1. Interior and 2. Line work.

A separate INTERIOR POWER AND LIGHT estimate is also prepared for fixing up nine street lights in the Jail premises by extending the 9th circuit that is running near the North rampart wall. The 220 v. 60 cycles secondaries run as far as the North rampart wall of the city. It is proposed to extend this 60 cycles secondary from near the North rampart wall upto the offices in the Jail on the - poles that will be fixed up for extending the street circuit.

The current for the different buildings of the Jail will be tapped from the 220 v. 60 cycles secondary mains and the distance are marked in the sketch.

The whole interior wiring is proposed to be finished in 2" x 1" two-way teak wood casing. There will be a separate meter for each of the quarters and one meter for all the buildings within the Jail compound and the latter will be fixed up in the Office.

All the

All the buildings in the Jail compound will be controlled and fed from the Office. The No: of lights are distributed as under:-

1. Jailor's Qrs: 10 drop lights, 4 brackets & one Water tight fitting.
2. Deputy Jailor's Qrs: 7 drop lights & 2 brackets.
3. Sub-Asst: Surgeons Qrs: 8 drop lights, 1 bracket 1 water tight fitting.
4.
   (a) Office 4 drop lights.
   (b) Kitchen block. 6 brackets.
   (c) Hospital and Dispensary. 2 drop lights. 2 drop lights.
   (d) Sentry room. 1 drop light.
   (e) One goose neck fitting near the Kitchen block
   (f) ---do---do----do---on the terrace of the ragi grinding room.

Wiring diagrams for the different buildings are attached to the respective estimates.

Since the street line poles will have to carry these bunglow lines, these estimates will only hold good if the estimate for installing street lights in the Jail compound is sanctioned, - - -

...tion.

****

Mysore,
31st May 1923.
MSS/VRG.

****

Superintendent, 31/6
Mysore Power & Light.

VERNMENT OF MYSORE. ELECTRICAL DEPARTMENT. 11

ESTIMATE No.....

For installing electric lights to the Jailors' Quarters, District, Jail, Mysore.

Reference.....

Chargeable to.....

Names of materials, etc.	Unit	Quantity	Rate	Amount	Remarks
			Rs. a. p.	Rs. a. p.	
Interior work.					
Running the mains in ¾" galvanised pipe from the overhead line to distribution board using No.12 B.&.S. insulated wire (stranded) completewith bends, clamps. etc.	16 ft.		L.S.	22 0 0	
Grounding the galvanised pipe.			L.S.	9 8 0	
Supplying, wiring and fitting in 1st class teak wood two way casing 2" x 1" treated with two coats of shellac varnish for drop lights complete with B.C.holders, ceiling roses, 5 amp. tumbler switch etc. using No.14 B.&.S.insulated 2500 megohm grade.	10		19 0 0	190 0 0	
do do for brass brackets 9" x ½" complete with B.C.holders 5 amp. tumbler switch etc.	4		16 0 0	64 0 0	
do do for water tight fitting complete with B.C.holder, 5 amp. tumbler switch etc.	one.		21 0 0	21 0 0	
Repairs to damaged masonry.			L.S.	7 8 0	
7. Bulb B.C.220 V. 16 c.p.		~~25~~ 15	0 10 8	10 0 0	
8. Enamelled tin shades.		14	0 13 3	11 9 6	
9. Teak wood board 24" x 18" x 1"		1	4 1 11	4 1 11	
10. do 24" x 18" x ½"		1	2 13 0	2 13 0	
11. Two way distribution box with circuit switches glass shutters miller lock and key.			L. S.	15 0 0	
12. D. P. Switch 5 amp.		1	L. S.	4 0 0	

contd.

Submitted by

.....

Dated .....

C. P. S. No. 138]
GOVERNMENT OF MYSORE. ELECTRICAL DEPARTMENT.

ESTIMATE No.....

For.....

Reference.....

Chargeable to.....

Names of materials, etc.	Unit	Quantity	Rate Rs.	a.	p.	Amount Rs.	a.	p.	Remarks
LINE WORK.									
13. No.2 pole 28' long.		one	30	0	0	30	0	0	
14. Guy set (guy wire, guy rod & anchor)		one	4	4	8	4	4	8	
15. Two pin D.C.A.for No.2 pole.	set.	one	3	15	4	3	15	4	
16. Brown insulators with pins.		8	1	3	10	9	14	8	
2 pin D.C.A.for No.1 pole complete		one	4	1	4	4	1	4	
17. No.8 Bare copper wire.	182 ft. or 9 lbs.		0	8	0	4	8	0	
18. Cart hire	L. S.					1	8	0	
19. Labour for exterior work.						8	0	0	
Total.					Rs.	427	12	5	
Incidental charges at 15 per cent on items 7 to 17 both inclusive.					Rs.	15	10	3	
Contingencies at 5 per cent.					Rs.	21	6	3	
Grand Total.					Rs.	464	12	11	

or Rs.465/- only.

Mysore,
Dated 30th May '23.

Submitted by
Mr. M. S. Shankaraiah,
Govt.Building Inspector.

Superintending Engineer,
Mysore Power and Lighting.

MSS/CNR.

C. P. S. No. 138]
GOVERNMENT OF MYSORE. ELECTRICAL DEPARTMENT.

ESTIMATE No.....

For installing electric lights to the Sub Assistant Surgeon"s Quarters, District Jail, Mysore.

Reference.....

Chargeable to.....

Names of materials, etc.	Unit	Quantity	Rate	Amount	Remarks
INTERIOR WORK.			Rs. a. p.	Rs. a. p.	
Running the mains in ¾" galvanised pipe from the overhead line to the distribution board using No.12 B.&.S. insulated wire stranded complete with bends, clamps etc.		24 ft.	L. S.	25 0 0	
Grounding the galvanised popes.			L. S.	8 8 0	
Supplying, wiring and fitting in 1st. class teak wood two way casing 2" x 1" treated with 2 coats of shellac varnish for drop lights, complete with B.C. holders, cieling roses, 5 amp. tumbler switches etc.		8	18 0 0	144 0 0	
do for brass bracket 9" x ½" complete with B.C.holder, 5 amp. tumbler switches		one.	16 0 0	16 0 0	
do for water tight fitting complete with B.cap holder, 5 amp. tumbler swithh etc.		one	21 0 0	21 0 0	
Running the mains from the main quarter to the kitchen block in ½" galvanised pipe using No.14 B.&.S. insulated wire.		15'		7 8 0	
Repairs to damaged masonry.			Lump sum.	6 8 0	
8. Bulbs B.C.220 volts 16 c.p.		10	0 10 8	6 10 8	
9. Shades tin enamel.		9	0 13 3	7 7 3	
10. Teak wood board 24" x18" x 1"		1	4 1 11	4 1 11	
11. Teak wood board 24" x 18" x 1/2"		1	2 13 0	2 13 0	
12. Two way distribution box with circuit switch, glass shutter miller lock and key.		1	L.S.	15 0 0	

Contd.

Submitted by

Dated

C. P. S. No. 138]

GOVERNMENT OF MYSORE. ELECTRICAL DEPARTMENT.

ESTIMATE No.....

For.....

Reference.....

Chargeable to.....2.....

Names of materials, etc.	Unit	Quantity	Rate	Amount	Remarks
			Rs. a. p.	Rs. a. p.	
13. D.P.Switch 5 amp.		one		4 0 0	
Line work.					
14. No.2 pole 28 ft. long.		4	30 0 0	120 0 0	
15. Guy set (guy wire, anchor & rod).	three		4 4 8	12 14 0	
16. Twp pin X arms for No.2 pole	complete.	1 set	3 15 4	3 15 4	
16.a.3 pin D.C.A.for No.2 pole	do	1 "	9 0 7	9 0 7	
17. 2 pin D.C.A.for No.1 pole	do	1 "	4 1 4	4 1 4	
18. 2 pin S.C.A.for No.2 pole	do	2 "	2 5 8	4 11 4	
18 a. brown insulators, with pins.		16	1 7 10	23 13 4	
19. No.8 bare copper wire.		990 ft. or 49½ lbs.	0 8 0 per lb.	24 12 0	
20. Binding wire.		1 lbs.	0 1 8	0 1 8	
21. Cart hire.			L. S.	6 0 0	
22. Labour for exterior work.			L.S.	25 0 0	
Total.			R.	502 14 5	
Contiggencies at 5 per cent.			R.	25 2 4	
Incidental charges at 15 per cent on items 8 to 20 both inclusive.			R.	36 8 2	
Grand Total.			R.	564 8 11	

or R.565/- only.

Mysore,

Dated 28-5-23.

MSS/CNR.

Superintendent,
Mysore Power & Lighting.

Submitted by

Mr. M. S. Shankariah,
Govt. Building Inspect

C. P. S. No. 138]
GOVERNMENT OF MYSORE. ELECTRICAL DEPARTMENT.

ESTIMATE No.....

For.....Estimate for installing electric lights to the.....

Reference.....Office, ~~or the~~ Kitchen block, Dispensary & Hospital,.....

Chargeable to.....Sentry room, and two goose neck fittings one near the kitchen block and another on the terrace of the Ragi Grinding Rooms of the Mysore Dt: Jail

Names of materials, etc.	Unit	Quantity	Rate Rs. a. p.	Amount Rs. a. p.	Remarks
OFFICE. **INTERIOR WORK.**					
1. Running the mains in ¾" gald: pipe from the overhead main line to distribution board and from the circuit channel to the overhead line in the same pipe for feeding t h e kitchen block etc., using No. 12 B&S insulated wire(stranded) complete with bends, clamps, etc.	19 ft:		0-0-0	24-0-0	
2. Grounding the galvanised pipe.			0-0-0	10-0-0	
3. Supplying wiring & fitting in 1st class t.w. 2-way casing 2" x 1" treated with 2 coats of Shellac varnish for drop lights complete with B.C. - holders ceiling roses 5 amp: tumbler switches using No. 14 B&S insulated wire 2500 Megohm grade.		4	22-8-0	90-0-0	
4. Repairs to damaged masonry.				5-0-0	
5. Bulbs B.C. 230 v. 50 C.P.		4	1-4-0	5-0-0	Osram.
6. Enamelled tin shades.		4	0-13-3	3-5-0	
7. Teak wood board 24"x18"x1"		1	4-1-11	4-1-11	
8. ---do--- 24"x18"x½"		1	2-13-0	2-13-0	
9. Two way distribution box with circuit, switches, glass shutter, Miller lock & key.		1	Lump Sum.	15-0-0	
10. D.P. Switch 10 amp:		1	"	6-0-0	
KITCHEN BLOCK.					
11. Running the mains in ¾" gald: pipe from the overhead line to distribution board in the south eastern corner of the					

continued.

Submitted by

Dated

C. P. S. No. 138]
GOVERNMENT OF MYSORE. ELECTRICAL DEPARTMENT.

ESTIMATE No.....

For.....

Reference.....

Chargeable to.....

Names of materials, etc.	Unit	Quantity	Rate	Amount	Remarks
			Rs. a. p.	Rs. a. p.	
11. of the kitchen block and from the ~~xxxxxxxxxxxx~~ Northern side of the kitchen block (to feed the B.C. goose neck - fitting etc.,) to the over head line using No.12 B&S - insulated wire (stranded) complete with bends, clamps, etc.,	Ft:	32	Lump Sum.	37-0-0	
12. Grounding the gald: pipe.			do	15-0-0	
13. Supplying wiring & fitting 1st class teak wood two-way casing 2" x 1" treated with 2 coats of Shellac varnish for 9" brass bracket complete with B.C. - holders 5 amp: tumbler switches.		6	22-0-0	132-0-0	
14. Repairs to damaged masonry.			LumpSum.	6-0-0	
15. Bulb B.C. 230 v. 50 c.p,		6	1-4-0	7-8-0	Osram.
16. Shades tin enamelled.		6	0-13-3	4-15-6	
17. Teak wood board 24" x 18" x 1"		1	4-1-11	4-1-11	
18. ------do------ 24" x 18" x ~~1~~		1	2-13-0	2-13-0	
19. Two-way distribution box with circuit switch glass shutter Miller lock and key.		1	LumpSum.	15-0-0	
20. D.P. Switch 10amp:		1	do	6-0-0	
HOSPITAL & DISPENSARY.					
21. Running the mains in ¾" gald: pipe from the overhead line to the Hospital on the southern side, and from the western side of the Hospital to the Dispensary using No.14 B&S insulated wire (stranded) complete with bends, clamps, etc.,		32 ft:	0-0-0	27-0-0	

Submitted by continued.

Dated

C. P. S. No. 138j
GOVERNMENT OF MYSORE. ELECTRICAL DEPARTMENT.

ESTIMATE No.....

For.....

Reference.....

Chargeable to.....

Names of materials, etc.	Unit	Quantity	Rate	Amount	Remarks
			Rs. a. p.	Rs. a. p.	
22. Grounding the galvanised pipe.			Lump Sum.	12-0-0	
23. Supplying wiring and fitting in 1st class teak wood two-way casing 2" x 1" treated with 2 coats of Shellac varnish for drop lights complete with B.C. holders ceiling roses, 5 amp: tumbler switchs etc., using No.14 B&S insulated 2500 Megohm grade.		4	19-0-0	76-0-0	
24. Repairs to damaged masonry.			Lump Sum.	5-0-0	
25. Bulb B.C. 220 v. 16 c.p.		2	0-10-8	1-5-4	
26. --do-- do -- 50 c.p.		2	1-4-0	2-8-0	Osram.
7. Shades tin enamel.		4	0-13-3	3-5-0	
SENTRY ROOM.					
28. Running the mains in ¾" gald: pipe from the overhead line to the Sentry room using No.12 B&S Insulated ~~xxxx~~ wire (stranded) complete with bends, clamps, etc.,		14 ft:	0-0-0	16-0-0	
29. Grounding the galvanised pipe				6-8-0	
30. Supplying wiring & fitting in 1st class teak wood two-way casing 2" x 1" treated with two coats of Shellac Varnish for drop lights complete with B.C. Holders, ceiling rose. 5 amp: Tumbler switch using No.14 B&S insulated wire 2500 Megohm grade.		1	19-0-0	19-0-0	
31. Repairs to damaged masonry.				1-0-0	
32. Bulb B.C. 250 volts 50 C.P.		1	1-4-0	1-4-0	Osram

continued.

Submitted by

Dated

C. P. S. No. 138]
GOVERNMENT OF MYSORE. ELECTRICAL DEPARTMENT.

ESTIMATE No.....

For .....

Reference .....

Chargeable to .....

WD 0786 CPB—100 books of 100 pages each—31-7-22

Names of materials, etc.	Unit	Quantity	Rate	Amount	Remarks
			Rs. a. p.	Rs. a. p.	
33. Shade tin enamel.			0-13-3	0-13-3	
				567- 5-11	
Contingencies at 5 %				28- 5-11	
Incidental charges on items 5-10, 15-20, 25-27, 32-33 (both inclusive). at 15%				12-14-1	
			Grand Total	Rs.608-9-11	or
Rupees six hundred and nine, only.					
Rs.609/-					
LINE WORK.					
1. No. 2 pole 28'		5	30-0-0	150-0-0	
2. ---do--- 24'		2	25-10-7	51-5-2	
3. Brace clamp for No.1 pole.		1	0-14-7	0-14-7	
4. Brace tongue.		1	1-0-11	1-0-11	
5. Bolts and nuts 2" x ½"		2	0-1-6	0-3-0	
6. 2-pin double X arm for No. 1 pole complete.	SETS.	2	4-1-4	8-2-8	
7. Two-pin double X arm for No.2 pole complete.	"	6	3-15-4	23-12-0	
8. Guy sets (guy wire, guy anchor, guy rods).		7	4-4-8	30-0-8	
9. U-Guards.		3	0-10-3	1-14-9	

Submitted by continued.

Dat

C. P. S. No. 138]
GOVERNMENT OF MYSORE. ELECTRICAL DEPARTMENT.

ESTIMATE No.....

For .....

Reference .....

Chargeable to .....

WD 0736- GPB—100 books of 100 pages each—31-7-22

Names of materials, etc.	Unit	Quantity	Rate	Amount	Remarks
CONTINUED					
			Rs. a. p.	Rs. a. p.	
10. Special 2 pin double X arm or 3 pin double X arm for No.2 pole complete for No.2 pole.		2	9-0-7	18-1-2	
11. ----do---for No.1 pole.		1	9-6-9	9-6-9	
12. Goose neck fitting suitable for B.C.holder complete with B.C. holder 50 c.p. 230 v. Bulbs etc.,		2	13-13-3	27-10-6	
12(a) Brown insulators with pins.		44	1-7-10	65-8-8	
13. Copper wire No.6 B&s.	1020' or 82 lbs		0-8-7	43-15-10	
14. Binding wire	lb	1	0-1-8	0-1-8	
15. Sundries such as solder etc:	Lump sum			5-0-0	
16. Special support for goose neck fitting to be fixed on the Ragi grinding room.	do			35-0-0	
17. Carthire	Lump sum			6-0-0	
18. Labour charges for exterior work	do			50-0-0	
			Total Rs.	528-2-4	
Contingencies at 5%				26-6-6	
Incidental charges at 15%				70-13-2	
			Total Rs.	625-6-0	
Interior Work.				608-9-11	
Exterior Work.				625-6-0	
			Grand Toval	1233-15-11 or	

Rupees One thousand two hundred and thirty four, only.

Rs.1234/-

Mysore,
Dated.....30-5-1923.
V.R.G.

Submitted by
Mr: M..S..Sankariah,
Government Building Insptr:

Superintendent,
MYSORE POWER & LIGHT.

C. P. S. No. 138]
GOVERNMENT OF MYSORE.

ELECTRICAL DEPARTMENT.

ESTIMATE No.....

For.....Estimate for installing electric lights to Deputy

Reference.....Jailor's Quarters, District, Jail, Mysore.

Chargeable to.....

Names of materials, etc.	Unit	Quantity	Rate	Amount	Remarks
			Rs. a. p.	Rs. a. p.	
INTERIOR WORK.					
1. Running the mains in ½" gald: pipe from the overhead line to distribution board using No.12 B&S insulated wire (xxxxxxxx stranded) complete with bends clamps, etc.,	Ft:	16	Lump Sum.	22-0-0	
2. Grounding the galvanised pipe.			do	7-8-0	
3. Supplying wiring and fitting in 1st class teak wood two way casing (2" x 1") treated with 2 coats of Shellac Varnish for drop lights complete with B.C. holders, ceiling roses, 5 amp: tumbler switches etc., using No.14 B&S insulated wire 2500 Meghom grade.		7	19-0-0	133-0-0	
4. ----do---for brass brackets - 9" x ½" complete with B.C. - holders, 5 amp: tumbler switches etc.,		2	16-0-0	32-0-0	
5. Repairs to damaged masonry.			Lump sum.	6-8-0	
6. Bulb B.C. 220 v. 16 C.P.		9	0-10-8	6-0-0	
7. Enamelled tin shades.		9	0-13-3	7-7-3	
8. Teak wood board 24"x18"x1"		1	4-1-11	4-1-11	
9. ---do---24"x18"x½"		1	2-13-0	2-13-0	
10. One way distribution box with circuit switch glass shutter Miller lock & key.		1	Lump Sum.	7-8-0	
11. D. P. Switch 5 amp:		1	do	4-0-0	
LINE WORK.					

Submitted by

Continued.

Dated

C. P. S. No. 138]

GOVERNMENT OF MYSORE. ELECTRICAL DEPARTMENT.

70

ESTIMATE No.....

For.....

Reference.....

Chargeable to.....

Names of materials, etc.	Unit	Quantity	Rate	Amount	Remarks
			Rs. a. p.	Rs. a. p.	
LINE WORK.					
12. No. 2 pole 28' long.		1	30-0-0	30-0-0	
13. Guy set (guy wire, guy anchor, guy rod).	Set	1	4-4-8	4-4-8	
14. Two pin double X arm for No.2 pole complete.	"	2	3-15-4	7-14-8	
14a. Brown insulators with pins.		8	1-7-10	11-14-8	
15. No. 8 bare copper wire. (185 ~~kms~~ Ft. or 9¼ lbs:)			0-8-0	4-10-0	
16. Cart hire.				1-8-0	
17. Labour for exterior work.				8-0-0	
				301-2-2	
Incidental charges at 15% (on items 6 to 15 both inclusive)				13-9-6	
Contigencies at 5 %				15-1-0	
			Grand Total	329-12-8	

Rupees Three hundred and Thirty only.

Rs.330/-

...Mysore,

Dated 28-5-23.

MSS/VRG.

Submitted by

Superintendent,

Mysore Power & Light.

...Mr:.. M.S...Sankaraiah,.....

Govt: Building...Inspr.....

IES IN THE JAIL COMPOUND AND ALSO THE WIRING

TIONED BELOW.

VI

OM.

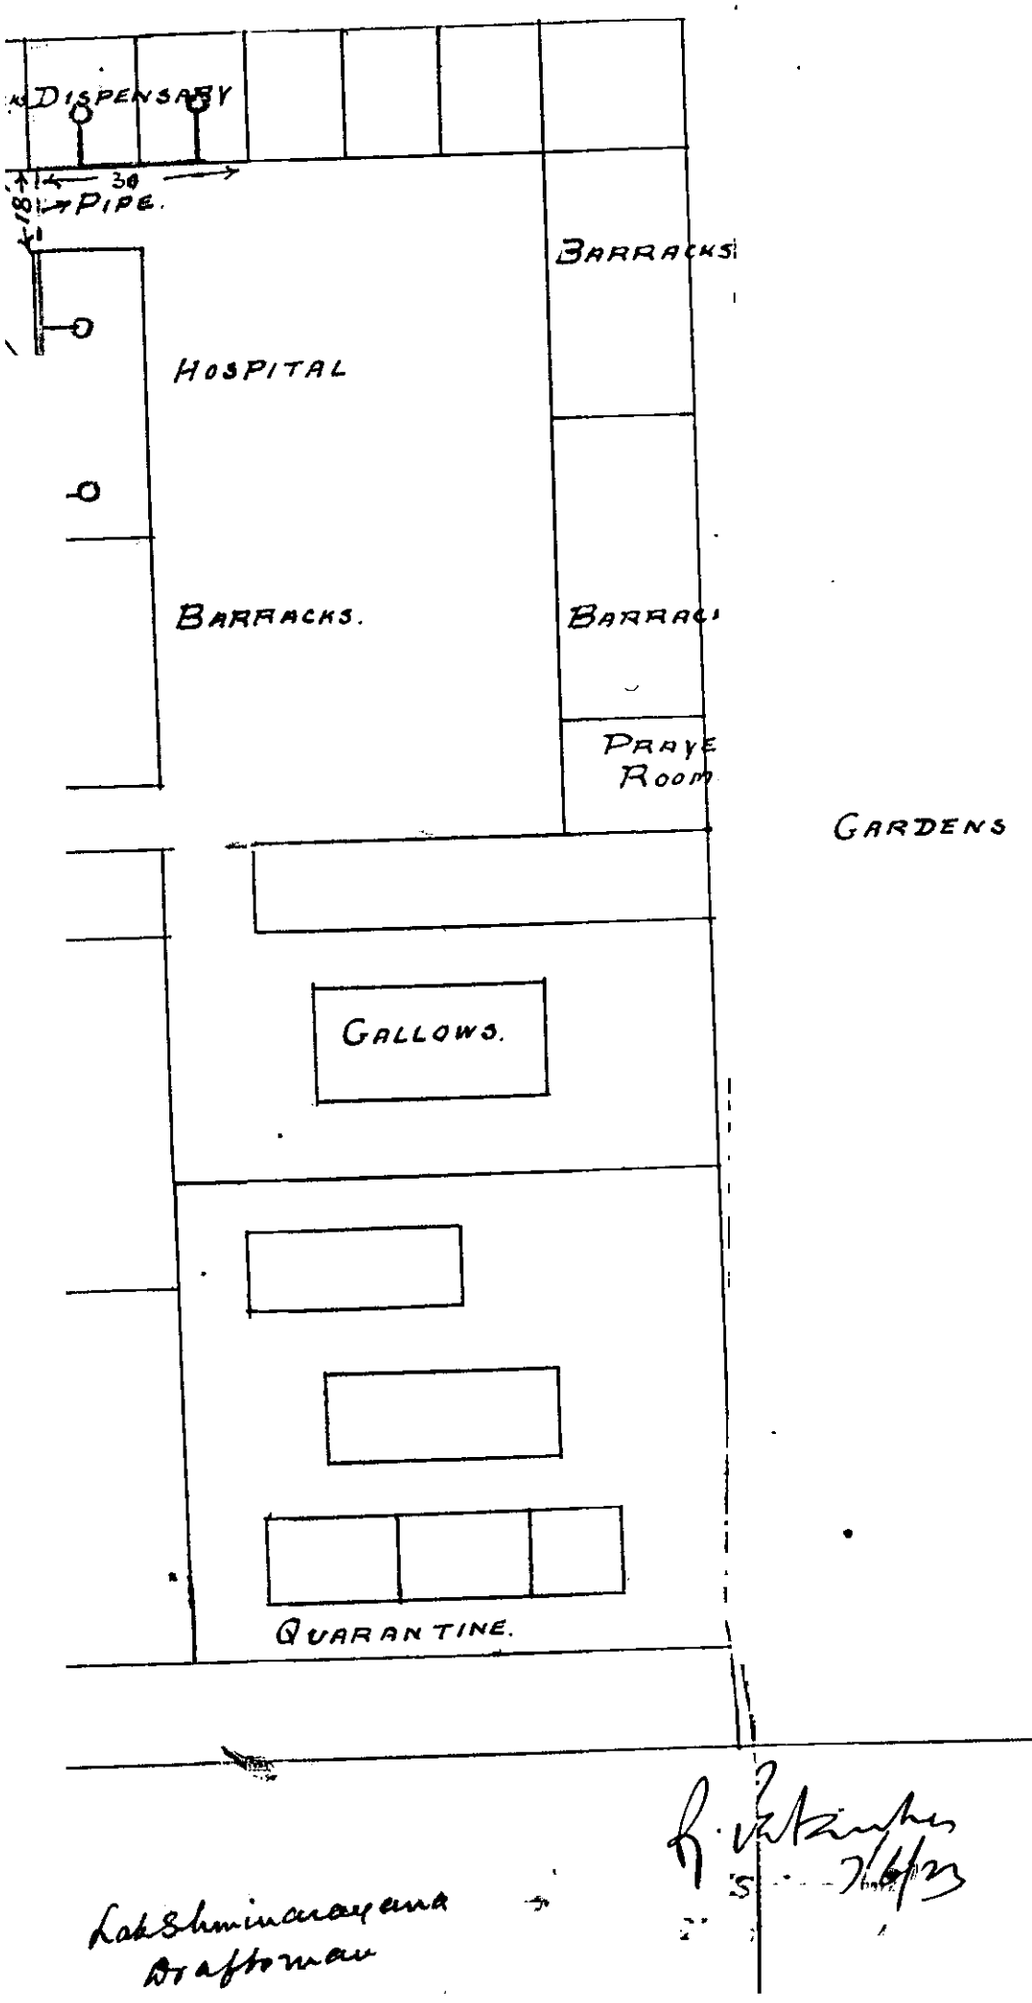

Lab & Sanitary and Draftsman

SKETCH SHOWING THE EXTENSION OF 60V SECO

ARRANGEMENTS IN THE OFFICES

GUAR

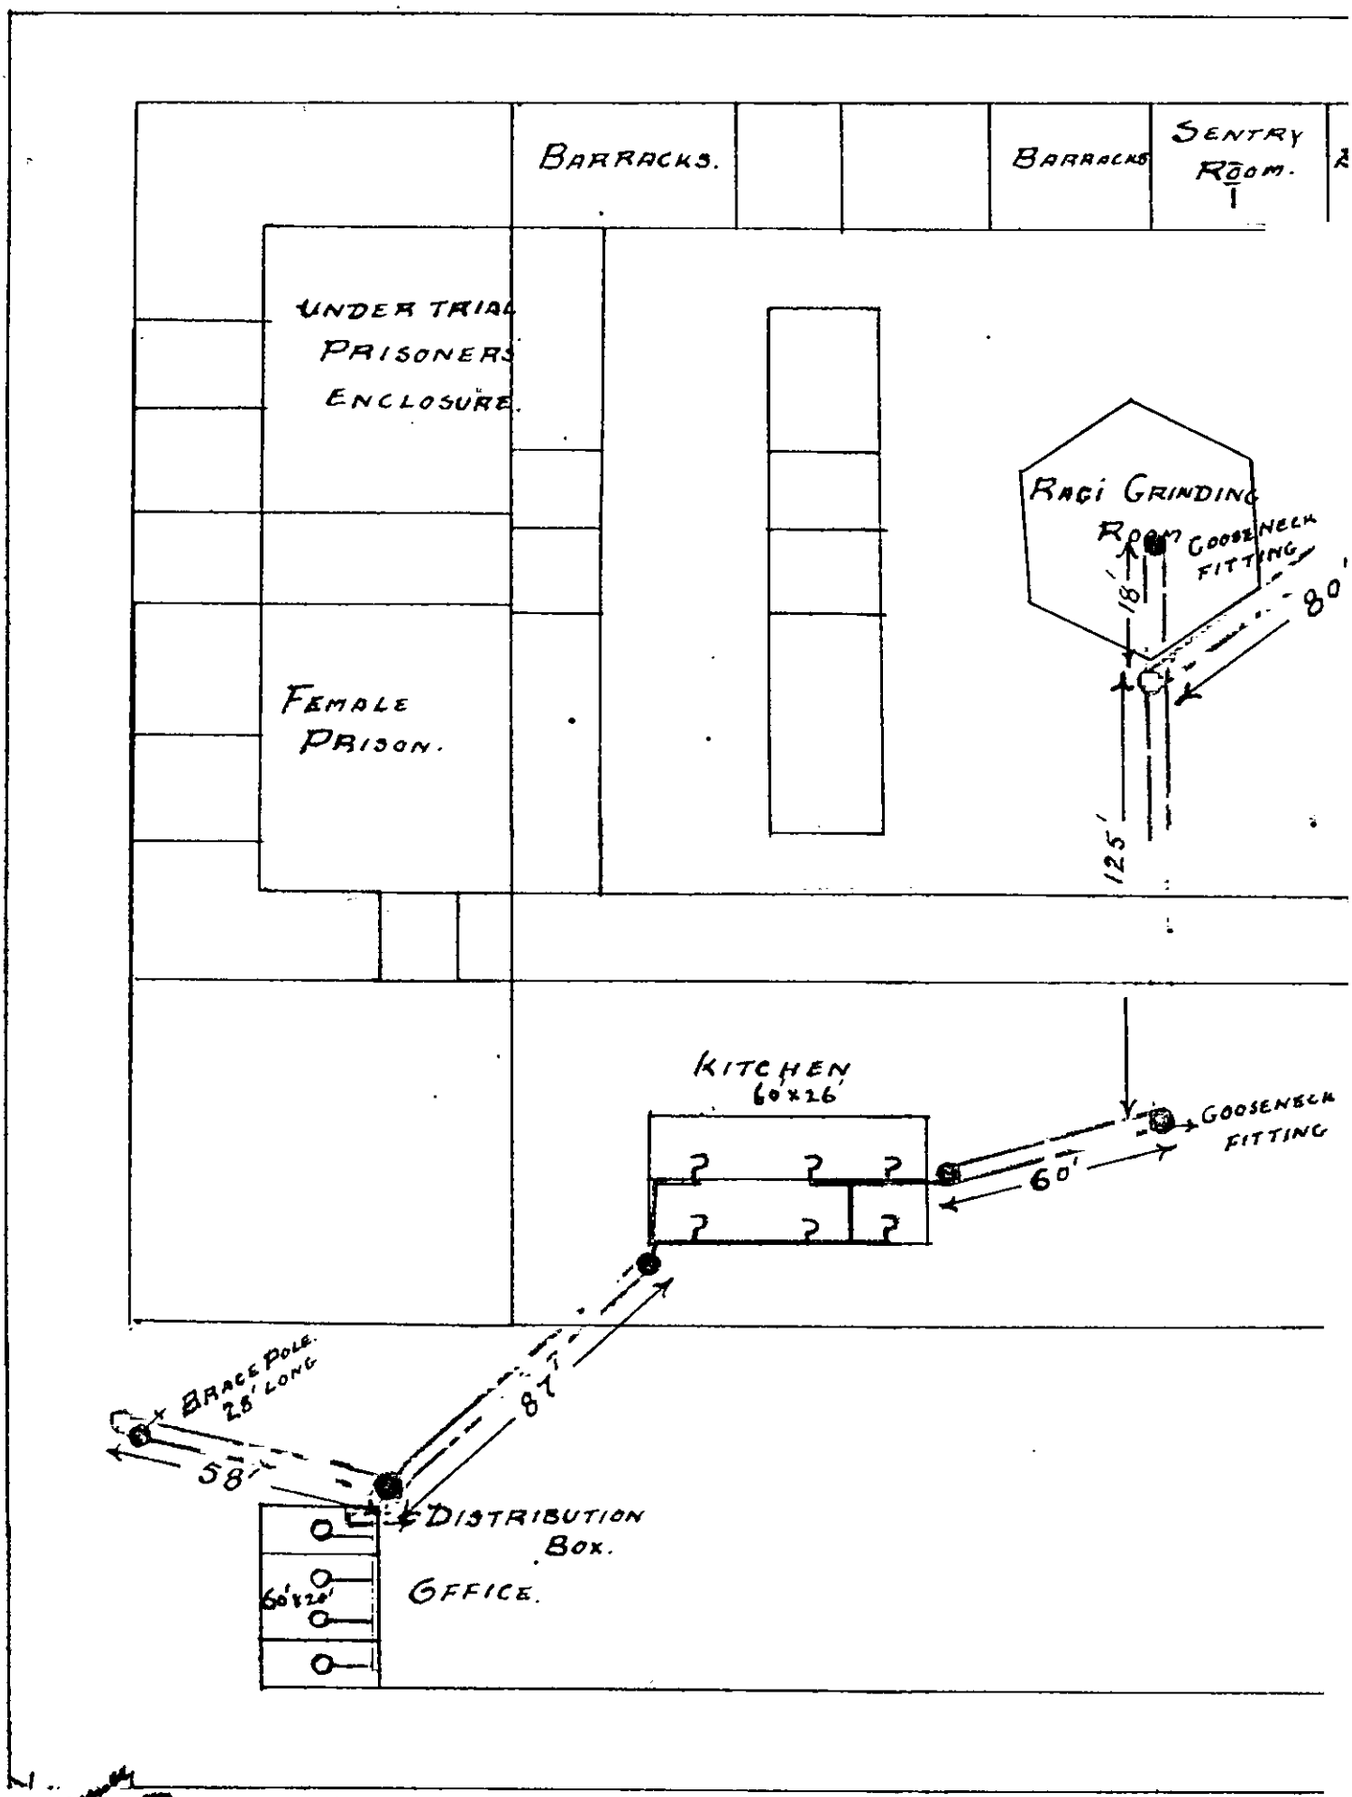

REFERENCES:-

- PROPOSED STREET POLE
- " POLES TO RUN SECONDARIES.
- " BRACE POLE
- DROP LIGHTS.
- BRACKETS.

SKETCH SHOWING WIRING DIAGRAM TO DEPUTY JAILOR'S QUARTERS.

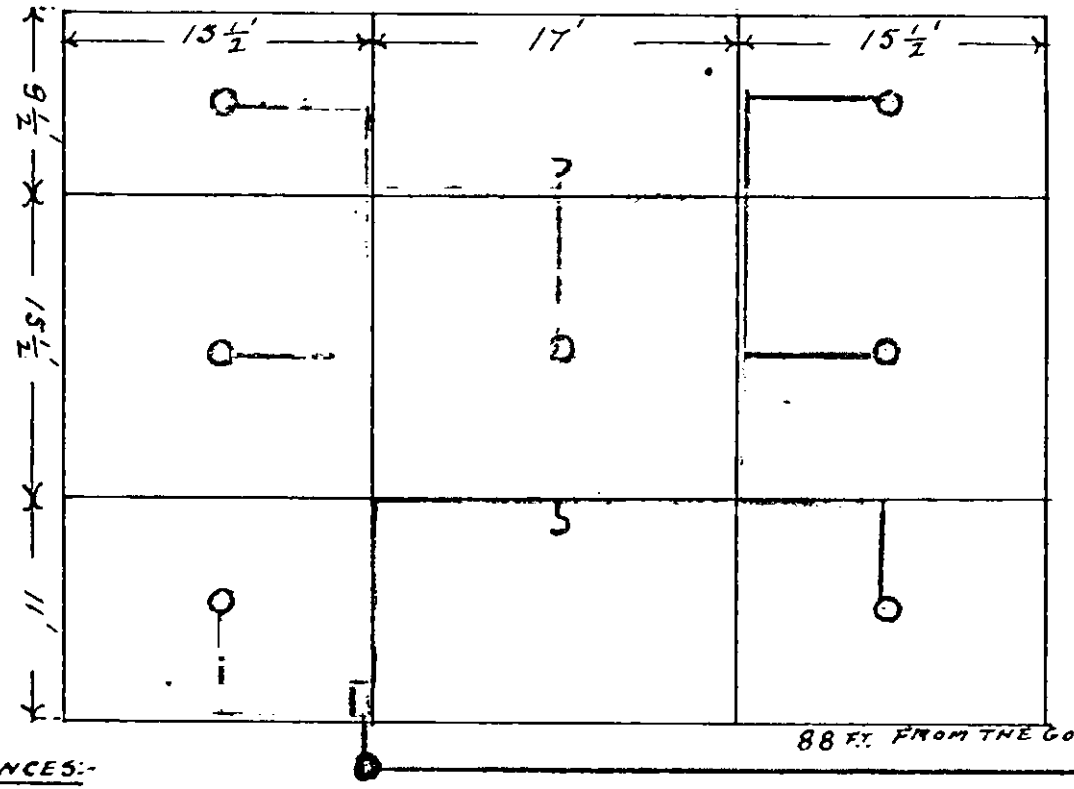

REFERENCES:-

O " DROP LIGHTS

5 BRACKET "

PROPOSED POLE.

" 220 V 60~ LINE. OVERHEAD

DISTRIBUTION BOARD.

Y. G. Lahiri & Nirmalananda
Draftsman 29/5/23

Superintendent
Public Works Dept. & Irrigation

SKETCH SHOWING THE WIRING DIAGRAM

OF JAILORS QUARTERS.

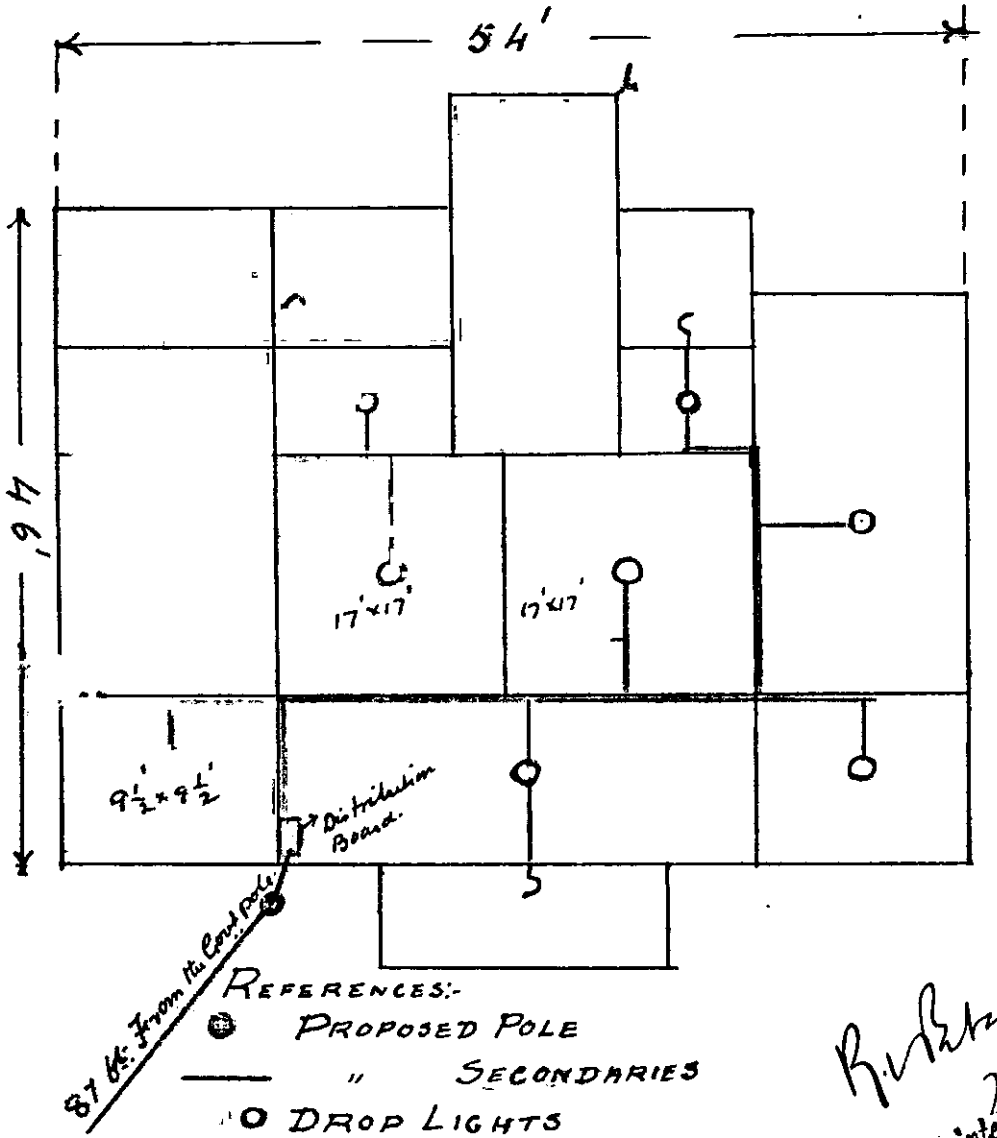

REFERENCES:-

- PROPOSED POLE
- " SECONDARIES
- DROP LIGHTS
- BRACKETS -
- WATER TIGHT BRACKET.

J. G. Lakshminarayana
Draftsman 29.5.1923

Superintendent,
Mysore Power & Engg.

SKETCH SHOWING THE WIRING DIAGRAM TO SUB-ASSISTANT SURGEON'S QUARTERS. DISTRICT JAIL. MYSORE.

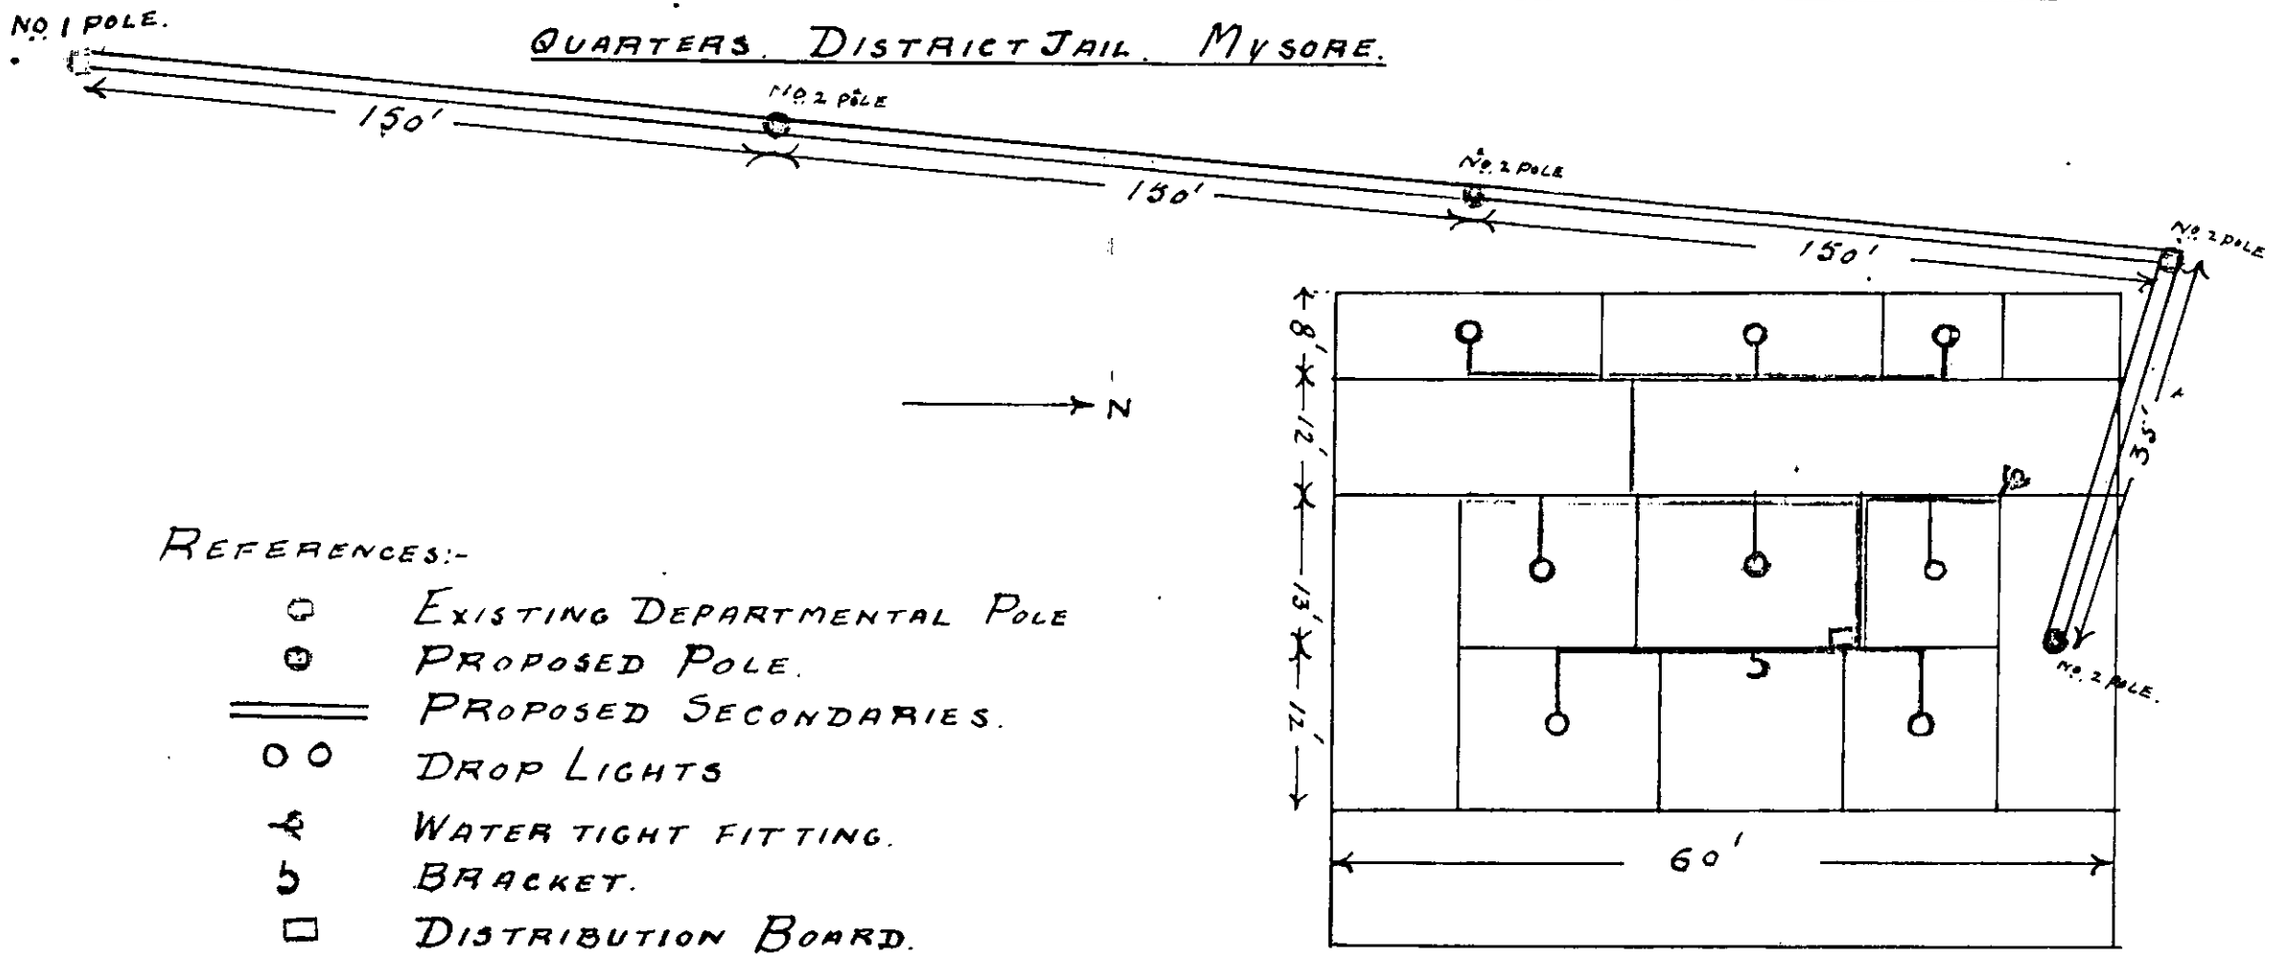

REFERENCES:-

- ○ EXISTING DEPARTMENTAL POLE
- ◉ PROPOSED POLE.
- ═══ PROPOSED SECONDARIES.
- ○ ○ DROP LIGHTS
- ⊰ WATER TIGHT FITTING.
- ♭ BRACKET.
- □ DISTRIBUTION BOARD.

T. G. Lakshminarayana
Draftsman
29.5.23

K. V. Ratnam

26

Office of the Superintendent,
Power and Light,
Mysore, 26th June 1923.

REPORT to accompany the estimate for running a telephone line (earth returning) from Mysore Power and Lighting, Exchange, to Mysore District Jail.

IT is proposed to run the line from Mysore Power and Lighting, Exchange on the existing poles upto Messrs. Nathmal Shop in Dodapett, crossing the old Post Office Road and continue along Dodapett as far as Krangere gate and turn towards Jail on the proposed street lighting poles as shown in the sketch. This estimate holds good if the proposed street lightingestimate is sanctioned.

VN/VRG.

Superintendent,
Mysore Power & Light.

MYSORE POWER AND LIGHT. ELECTRICAL DEPARTMENT.

ESTIMATE FOR RUNNING TELEPHONE LINE FROM m.P.L. EXCHANGE TO MYSORE JAIL AND INSTALLING A TELEPHONE IN THE SAME.

Particulars.	Qy:	Rate.	Amount.
Galvanised wire No.12 including binding wire sag, etc., (6300' or 110)	Lbs.	0 4 0	27 8 0
Distribution 2 pin cross arms.	20	1 3 3	24 1 0
No.1 pole clamps.	6	0 15 8	5 14 0
Bolts & nuts ½" x 1½"	12	0 1 4	1 0 0
Six pin cross arms telephone.	2	3 7 0	6 14 0
Four -----do-----	7	1 8 1	10 8 7
Insulators brown.	45	1 3 10	55 12 6
Wooden pins.	45	0 4 0	11 4 0
Long distance wall telephone.	1	84 8 1	84 8 1
Leclanche glass cells.	3	1 0 0	3 0 0
Porous pots.	3	1 0 0	3 0 0
Zinc rods.	3	0 6 4	1 3 0
Salammoniac	Lb: 1	0 10 3	0 10 3
Lightning arrestor with cartridge fuses.	2	5 13 0	11 10 0
Screws of sizes.		Lump Sum.	1 0 0
Solder, paste.		do	5 0 0
Tinned copper wire No.6 (180' or Lbs.15)		0 11 3	10 8 9
-----do----- clamp for ¾" pipe	1	0 13 4	0 13 4
Interior wiring.		Lump Sum.	20 0 0
Dealwood battery box for 3 cells.	1	3 6 0	3 6 0
Insulated foot board.	1	8 10 8	8 10 8
Teak wood board 2½' x 1½'	1	5 0 0	5 0 0
Cart hire.		Lump Sum.	3 0 0
Telephone pole.	1	25 10 7	25 10 7
Labour charges.		Lump Sum.	50 0 0
		Total Rs.	379 14 9

Brought Forward	Rs.	379 14	9
Contingencies at 5 per cent.	"	18 15	11
Incidental charges at 15 per cent.	"	49 0	7
GRAND TOTAL	"	447 15	3

Or rupees four hundred and forty eight only.

Rs.448/-

R. Ratnam
Superintendent, 27/6/23
Mysore Power and Lighting

Mysore,
26th JUNE '23.
BGR/VRG.

G. R. S. VI—G/32]

SUBJECT.....

.....

.....

Diary No. of letter replied to 653

General and Revenue Secretariat

( )

, the *191* .

Date of issue 30/8/23

Signed by McCAG

Section Fais

File No. 16-23

Serial No. 2

No. 6/1302

To

The Lt. Governor

Sir,

With reference your letter no: 1409/32-22 dated 6-8-23 forwarding estimates for electric light and telephone connection to the Lyons Jail, I am directed to state that the question of providing electric light for the several quarters of the Jail staff may be over for the present, and that Govt will be prepared to accord their sanction for

over.

30 1/0 4

granting lights & telephone connection in the estimate for which total Rs 1682, provided specific source to meet the cost in the current year's Budget is pointed out

the estimate of Rs 1234 2 ..... to provide lights for the Offices, Kitchen hospital etc and to the estimate of Rs 448] for the telephone connection

Thanks &c

cag
MB
Secl dep

Secl
21/8/75

List of enclosures.

Copied by

Examined by

14787

3| 1982/P

1789
32-22

Office of the Inspector-General of Prisons
in Mysore,
Bangalore, 3rd November 1923.

From

Dr. . Mahomed Usmon L.M.& S.,
A.I. Inspector-General of Prisons
in Mysore, Bangalore.

13.

B. Nagappa Esqr., Bar-At-Law.,
Secretary to the Government of H.H. the Maharaja
of Mysore, Local and Legislative
Departments, Bangalore.

Sir,

Adverting to your letter No.P.1302/Pris 16-23-3 dated 30th August 1923, stating that the sanction will be accorded to the estimate of Rs. 1234/- to provide lights for the Office, Kitchen, Hospital etc., of the Jail Buildings at Mysore and to the estimate of Rs. 448/- for Telephone connection to the said Jail, provided specific source is pointed out, from the current year's Prisons Budget, for the purpose, I have the honour to state that the Superintendent of the Jail, intimates in his letter No.1517 dated the 17th October 1923, that it is not possible to say whether savings to the extent required for the above purpose, can be effected, out of the amount apportioned for expenditure, to the Jail, during 1923-24, and requests to make provision from the general savings of the Department.

2. As it is too early for me, to anticipate any savings for the purpose, from the Prisons Budget of the current year, I request you to kindly obtain sanction of Government, to meet the cost thereof, from the general savings of the State Budget as the work in question, being an important and urgent one.

I have the honour to be,
Sir,
Your most obedient servant,

P. Mahomed